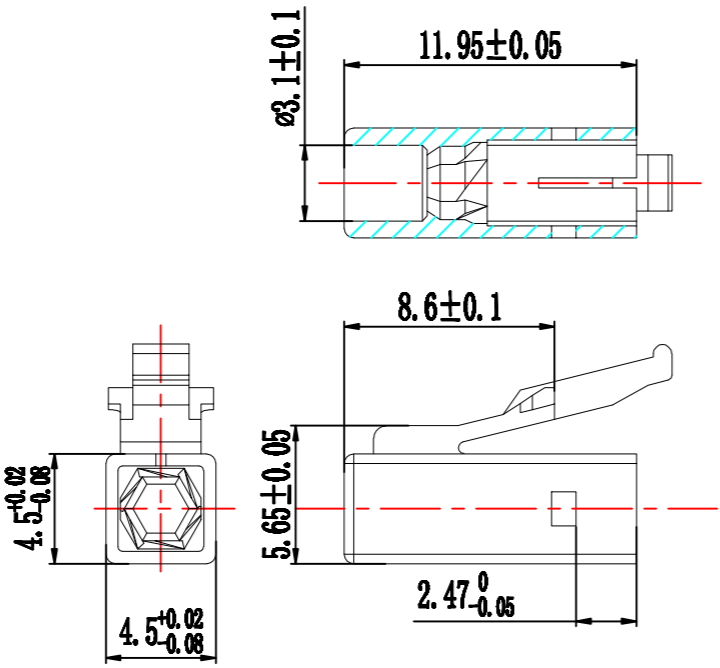
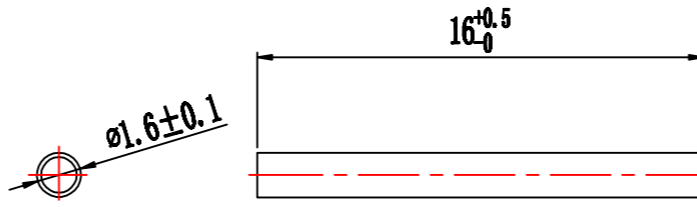
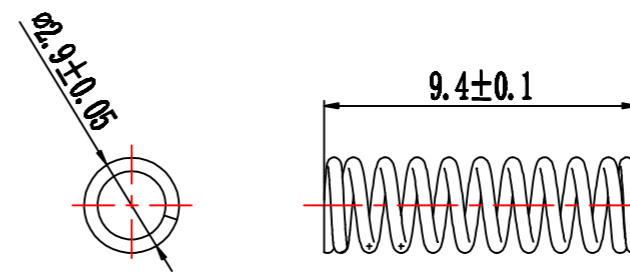
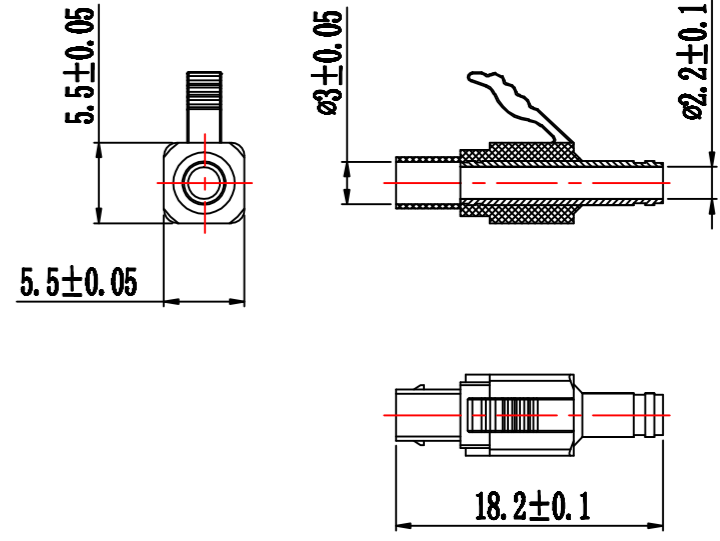
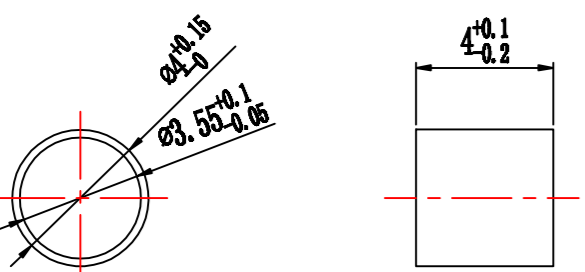
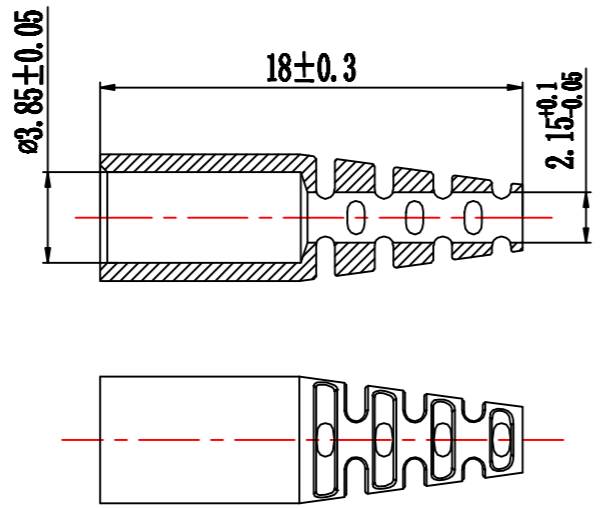
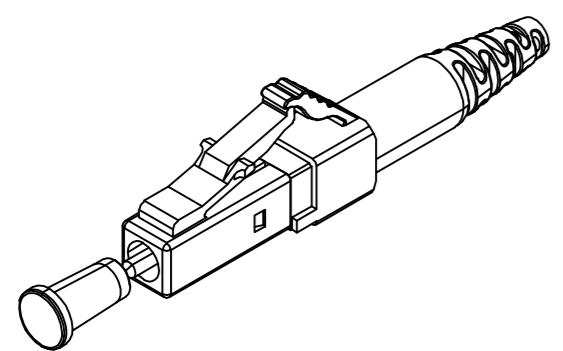
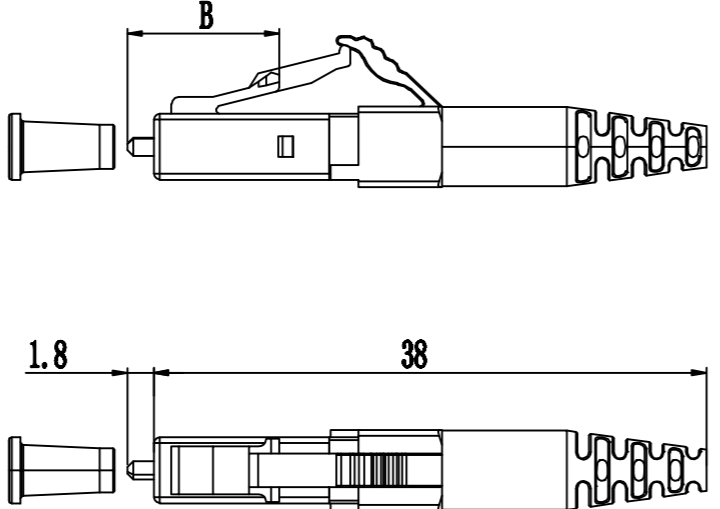
 <p>名称: 防尘帽 材料: TPE</p>	 <p>名称: 前套 材料: PPSU</p>	 <p>名称: 防胶管 材料: PTFE</p>	 <p>名称: 弹簧 材料: SUS304</p>	 <p>名称: 单联止档 材料: PPSU+H63</p>														
 <p>名称: LC2.0压接环 材料: 6061#</p>	 <p>名称: LC2.0尾套 材料: TPE</p>	<p>技术要求:</p> <ol style="list-style-type: none"> 1. 产品工作环境为-40℃+85℃。 2. 尺寸B(左图示) 压至$\leq 10\text{mm}$时弹簧压力为$\geq 5.0\text{N}$, 尺寸B(左图示) 压至$\geq 9.8\text{mm}$时弹簧压力为$\leq 6.0\text{N}$。 3. 金属件经96小时5% NaCl 盐雾实验后应无腐蚀现象。 																
		<table border="1"> <tr> <td>公差表</td> <td>± mm</td> </tr> <tr> <td>X</td> <td>± 0.2</td> </tr> <tr> <td>X.X</td> <td>± 0.1</td> </tr> <tr> <td>X.XX</td> <td>± 0.05</td> </tr> <tr> <td>X.XXX</td> <td>± 0.03</td> </tr> <tr> <td>X°</td> <td>± 2°</td> </tr> <tr> <td>X.X°</td> <td>± 1°</td> </tr> </table>	公差表	± mm	X	± 0.2	X.X	± 0.1	X.XX	± 0.05	X.XXX	± 0.03	X°	± 2°	X.X°	± 1°	<p>产品名称: LC-2.0单联连接器18长</p> <p>比例: 1:1</p> <p>单位: mm</p>	<p>图号: OYH-JS-ZP-109</p> <p>批准: _____</p> <p>日期: _____</p> <p>版本: A/2</p> <p>浙江歐亞華通訊設備有限公司 ZHEJIANG OYARWA COMMUNICATION EQUIPMENT CO.,LTD.</p>
公差表	± mm																	
X	± 0.2																	
X.X	± 0.1																	
X.XX	± 0.05																	
X.XXX	± 0.03																	
X°	± 2°																	
X.X°	± 1°																	
<table border="1"> <tr> <td>A2</td> <td>技术要求更新</td> <td></td> <td>陈中旭</td> <td>2021.05.26</td> </tr> <tr> <td>版本号</td> <td>变更内容</td> <td>位置</td> <td>变更人</td> <td>日期</td> </tr> </table>	A2	技术要求更新		陈中旭	2021.05.26	版本号	变更内容	位置	变更人	日期								
A2	技术要求更新		陈中旭	2021.05.26														
版本号	变更内容	位置	变更人	日期														